


BREWER COWLS

Brewer Birdguard

Two models Available:


Gas and oil (small mesh)

Solid fuel and oil (large mesh)

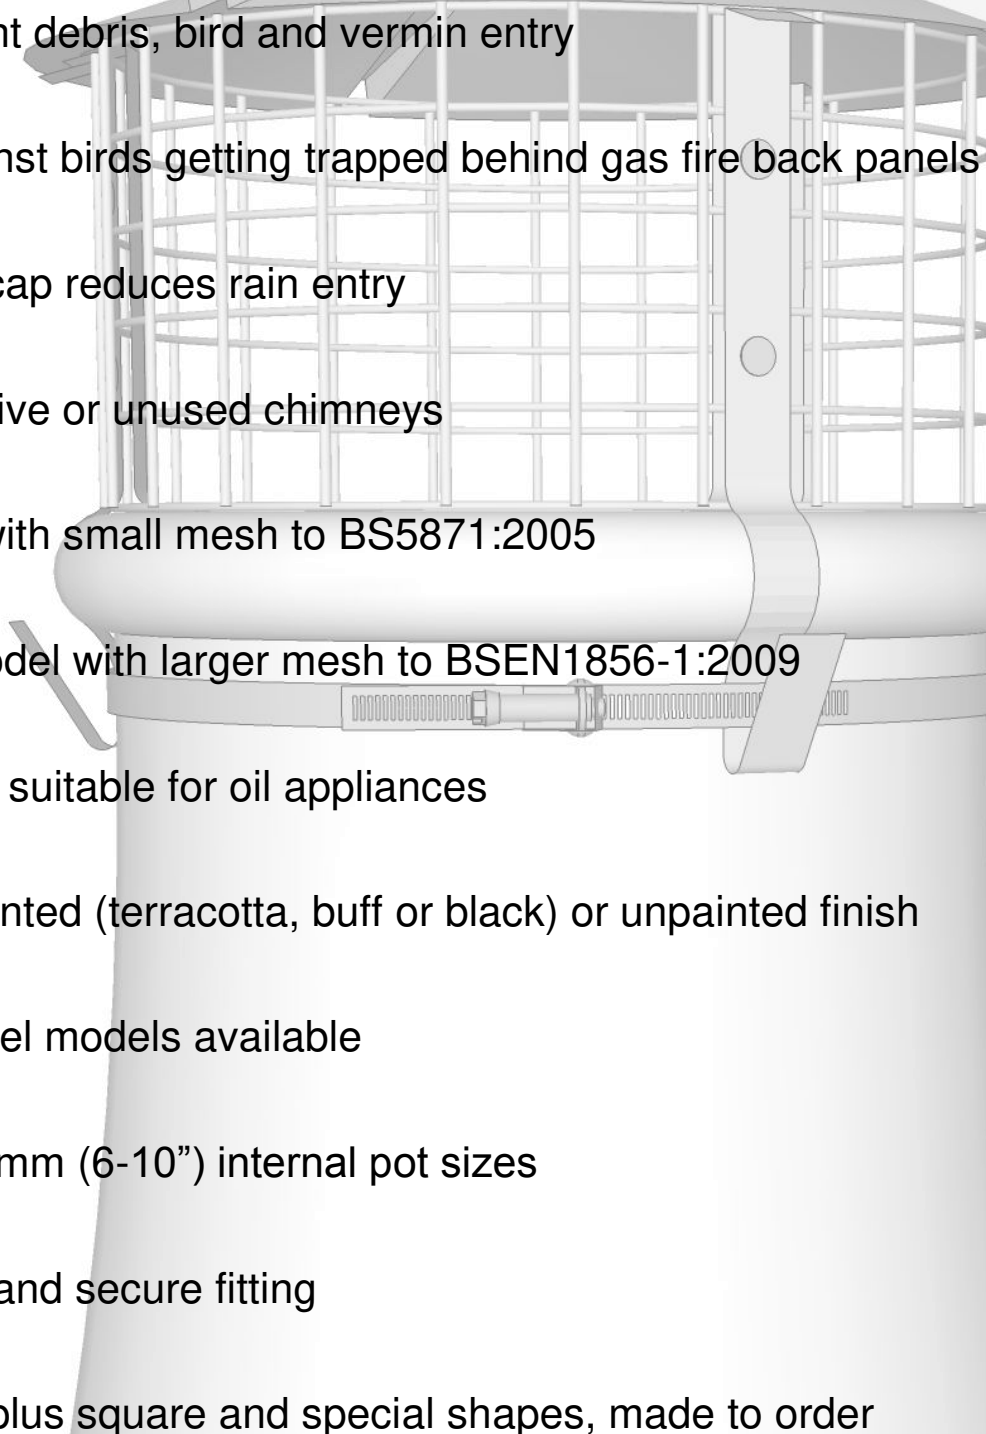
- Helps prevent debris, bird and vermin entry
 - Guards against birds getting trapped behind gas fire back panels
 - Integral raincap reduces rain entry
 - Suitable for live or unused chimneys
 - Gas model with small mesh to BS5871:2005
 - Solid fuel model with larger mesh to BSEN1856-1:2009
 - Either model suitable for oil appliances
 - Available painted (terracotta, buff or black) or unpainted finish
 - Stainless steel models available
 - Fits 150-250mm (6-10") internal pot sizes
 - Simple, fast and secure fitting
 - Other sizes plus square and special shapes, made to order
- 

Fitting instructions for all Birdguard models

Important: ensure you have the correct model of terminal to match your fuel type and application.

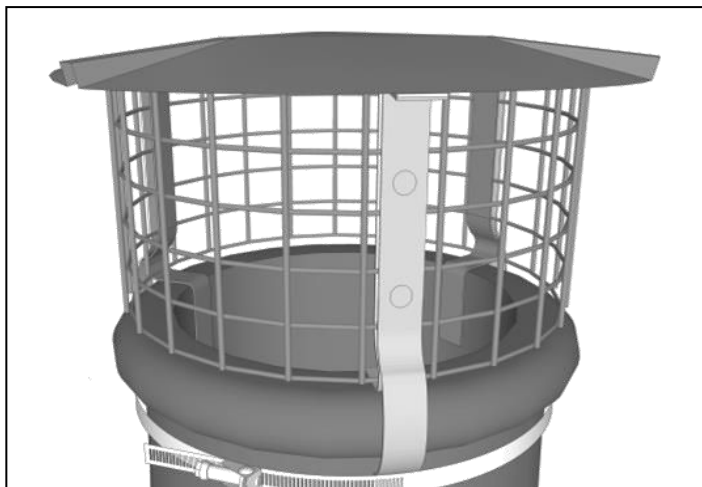

Large mesh suitable for solid fuel & oil

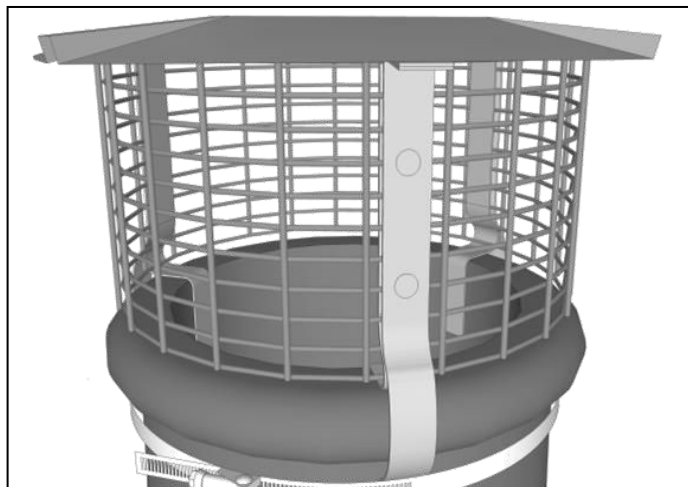

Small mesh suitable for gas & oil

To fit the Birdguard

1. With the Birdguard unpacked (Fig1), bend the longer external legs outwards.
2. Place the Birdguard centrally on the chimney. (Fig 2)
3. Bend the shorter internal legs down the inside face of the chimney. (Fig2)
4. Bend the longer external legs down the outside face of the chimney. (Fig3)
5. Pass the stainless steel band around the longer external legs. (Fig3)
6. Position the stainless steel band approximately 50mm (2") above the lower edge of the legs. (Fig3)
7. Tighten the stainless steel band with a flat bladed screwdriver.
8. Bend bottom of legs back upwards over the stainless steel band and trim if necessary. (Fig4)

Never install the unit with the top of the chimney or any other object positioned inside the central area of the mesh. This area must be kept clear to allow products of combustion to escape (fig 5).

Fig 1

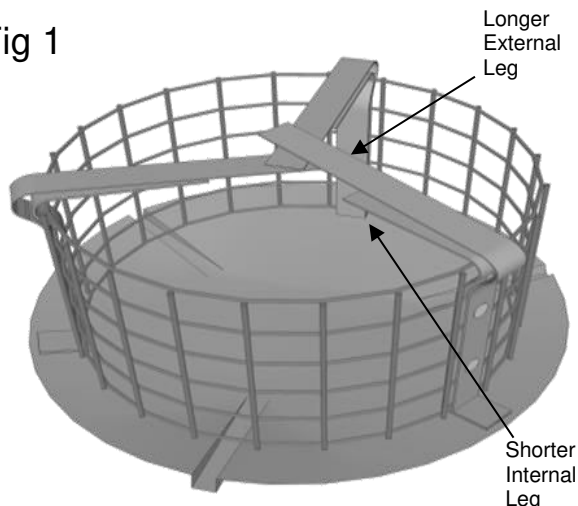


Fig 2

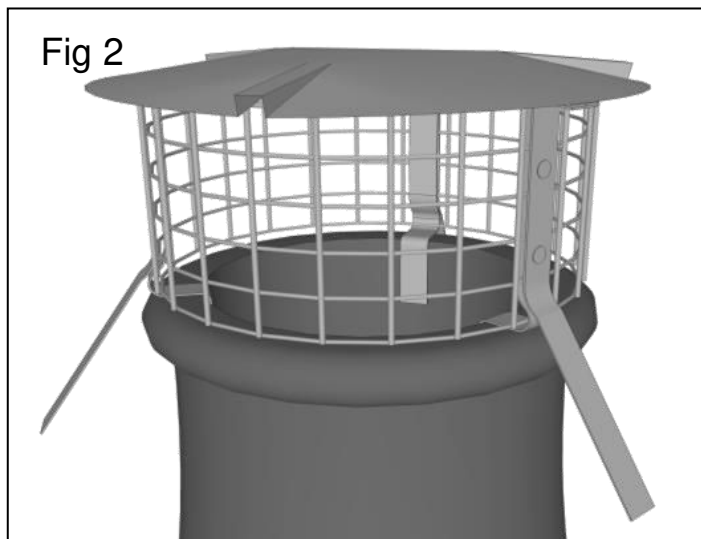


Fig 3

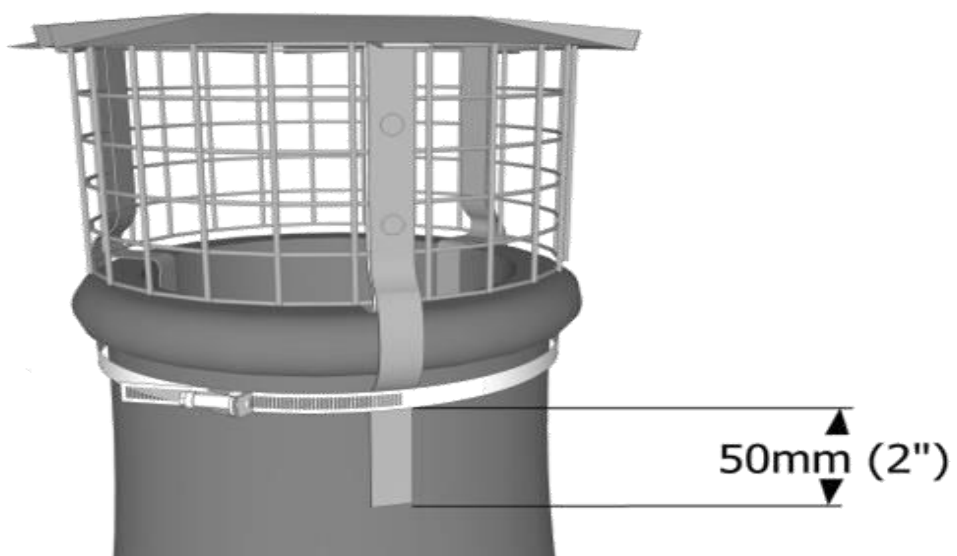


Fig 4


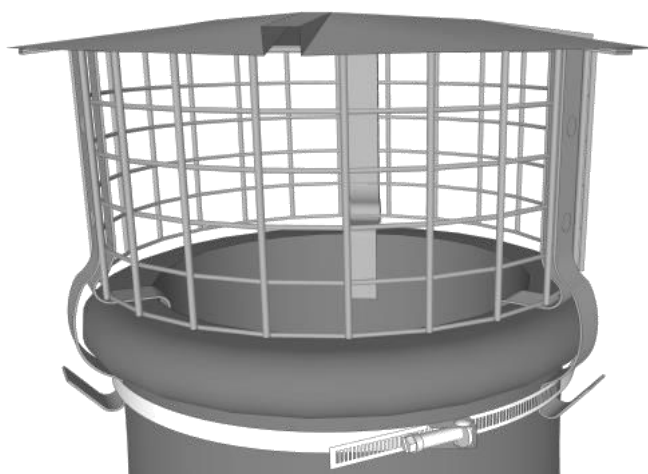


Fig 5

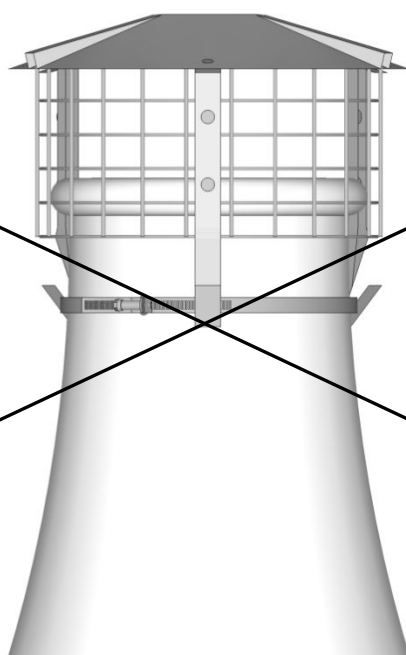

Declaration of conformity

Brewer Metalcraft Ltd
Units C&D Ford Lane Industrial Estate
Ford (Near Arundel)
West Sussex BN18 0DF
United Kingdom

13

1856-1:2009 Chimneys - Requirements for metal
chimneys - Part 1: System chimney products

Metal system chimney fitting - Terminal

Essential Characteristic	Performance
Flow resistance Coefficient	ζ 0.27
Durability: Freeze thaw	Pass

Technical Information

Model	Birdguard
Fitting range (internal chimney diameter)	150-250mm
Coefficient of flow resistance	ζ 0.27

