

DECLARATION OF PERFORMANCE

Certificate No. 0004-CPR-170918

1. Unique identification of the product-type:

Spacesaver
Spacesaver Plus
Spacesaver Ready-Cut
Spacesaver Lite

See table here under...

2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4):

See table here under...

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

Thermal Insulation for Buildings.

Factory made glass mineral wool thermal products

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant Article 11(5):

Saint-Gobain Isover, Whitehouse Industrial Estate, Runcorn, Cheshire, WA7 3DP, UK

5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in article 12(2):

N/A

6. System or systems of Assessment and Verification of Constancy (AVCP) of Performance of the construction product as set out in Annex V:

System 1 (Reaction to fire)
System 3 (all other declared properties)

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:

Warrington Certification Ltd (1121)

performed initial and continuous surveillance of the place of manufacture and the factory production control implemented, sampled product and witnessed initial type testing under

System 1 and System 3

and issued

**the Certificate of Constancy of Performance (1121-CPD-BA0053)
and Certificate of Conformity of the Factory Production Control**

0004-CPR-170918

Saint-Gobain Isover reserve the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Saint-Gobain Isover will endeavor to ensure publications are up to date, it is the users responsibility to check with us that it is correct prior to use.

ISOver
SAINT-GOBAIN

8. Declared performance table: According to EN 13162:2012+A1:2015

Essential Characteristics	Performance	Abbrev.	Unit	Declared Performance						
Product Name				Spacesaver	Spacesaver	Spacesaver	Spacesaver	Spacesaver Plus	Spacesaver Plus	Spacesaver Plus
Product Code				5200623966	5200625347	5200625349	5200623967	5200625357	5200625359	5200625361
Reaction to fire	Reaction to fire	RtF	Euroclass	A1	A1	A1	A1	A1	A1	A1
Release of dangerous substances	Release of dangerous substances			NPD						
Acoustic absorption index	Sound absorption			NPD						
Impact noise transmission index	Dynamic stiffness			NPD						
	Thickness	d_L		NPD						
	Compressibility	c		NPD						
	Air flow resistivity	AF_r		NPD						
Direct airbourne sound insulation index	Air flow resistivity	AF_r		NPD						
Continuous glowing combustion	Continuous glowing combustion			NPD						
Thermal resistance	Thermal resistance	R_D	$m^2 K/W$	2.25	3.40	3.85	4.55	2.50	3.75	5.00
	Thermal conductivity	λ_D	$W/m K$	0.044	0.044	0.044	0.044	0.040	0.040	0.040
	Thickness	d_N	mm	100	150	170	200	150	170	200
	Thickness class	Ti		T1	T1	T1	T1	T1	T1	T1
Water permeability	Short term water absorption	W_p	kg/m^2	NPD						
	Long term water absorption	W_{lp}		NPD						
Water vapour permeability	Water vapour transmission	t or Z		NPD						
Compressive strength	Compressive stress or compressive strength	CS		NPD						
	Point load	F_p		NPD						
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability characteristics (a) (b)			NPD						
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal resistance (c)	R_D	$m^2 K/W$	2.25	3.40	3.85	4.55	2.50	3.75	5.00
	Thermal conductivity (c)	λ_D	$W/m K$	0.044	0.044	0.044	0.044	0.040	0.040	0.040
	Durability characteristics (d)	d		NPD						
Tensile/fluxural strength	Tensile strength perpendicular to faces (e)	TR		NPD						
Durability of compressive strength against heat, weathering, ageing/degradation	Compressive Creep	Xct, Xt		NPD						

- a) No change in reaction to fire properties for mineral wool products.
- (b) The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of the product is related to the organic content, which cannot increase with time.
- (c) The Thermal conductivity of mineral wool products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air.
- (d) For dimensional stability thickness only.
- (e) This characteristic also covers handling and installation.

0004-CPR-170918

Saint-Gobain Isover reserve the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Saint-Gobain Isover will endeavor to ensure publications are up to date, it is the users responsibility to check with us that it is correct prior to use.

8. Declared performance table: According to EN 13162:2012+A1:2015

Essential Characteristics	Performance	Abbrev.	Unit	Declared Performance					
Product Name				Spacesaver Ready-Cut (3X386)	Spacesaver Ready-Cut (2X580)	Spacesaver Ready-Cut (3X386)	Spacesaver Ready-Cut (2X580)	Spacesaver Ready-Cut (3X386)	Spacesaver Ready-Cut (2X580)
Product Code				5200625586	5200625587	5200625589	5200625588	5200625590	5200625591
Reaction to fire	Reaction to fire	RtF	Euroclass	A1	A1	A1	A1	A1	A1
Release of dangerous substances	Release of dangerous substances			NPD					
Acoustic absorption index	Sound absorption			NPD					
Impact noise transmission index	Dynamic stiffness			NPD					
	Thickness	d_L		NPD					
	Compressibility	c		NPD					
	Air flow resistivity	AF_r		NPD					
Direct airbourne sound insulation index	Air flow resistivity	AF_r		NPD					
Continuous glowing combustion	Continuous glowing combustion			NPD					
Thermal resistance	Thermal resistance	R_D	$m^2 K/W$	2.25	2.25	3.40	3.40	4.55	4.55
	Thermal conductivity	λ_D	$W/m K$	0.044	0.044	0.044	0.044	0.044	0.044
	Thickness	d_N	mm	100	100	150	150	200	200
	Thickness class	Ti		T1	T1	T1	T1	T1	T1
Water permeability	Short term water absorption	W_p	kg/m^2	NPD					
	Long term water absorption	W_{lp}		NPD					
Water vapour permeability	Water vapour transmission	t or Z		NPD					
Compressive strength	Compressive stress or compressive strength	CS		NPD					
	Point load	F_p		NPD					
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability characteristics (a) (b)			NPD					
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal resistance (c)	R_D	$m^2 K/W$	2.25	2.25	3.40	3.40	4.55	4.55
	Thermal conductivity (c)	λ_D	$W/m K$	0.044	0.044	0.044	0.044	0.044	0.044
	Durability characteristics (d)	d		NPD					
Tensile/fluxural strength	Tensile strength perpendicular to faces (e)	TR		NPD					
Durability of compressive strength against heat, weathering, ageing/degradation	Compressive Creep	Xct, Xt		NPD					

- a) No change in reaction to fire properties for mineral wool products.
- b) The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of the product is related to the organic content, which cannot increase with time.
- c) The Thermal conductivity of mineral wool products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air.
- d) For dimensional stability thickness only.
- e) This characteristic also covers handling and installation.

0004-CPR-170918

Saint-Gobain Isover reserve the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Saint-Gobain Isover will endeavor to ensure publications are up to date, it is the users responsibility to check with us that it is correct prior to use.

8. Declared performance table: According to EN 13162:2012+A1:2015

Essential Characteristics	Performance	Abbrev.	Unit	Declared Performance			
Product Name				Spacesaver Lite	Spacesaver Lite	Spacesaver Lite	Spacesaver Lite
Product Code				5200771442	5200771435	5200774795	5200771402
Reaction to fire	Reaction to fire	RtF	Euroclass	A1	A1	A1	A1
Release of dangerous substances	Release of dangerous substances			NPD			
Acoustic absorption index	Sound absorption			NPD			
Impact noise transmission index	Dynamic stiffness			NPD			
	Thickness	d_L		NPD			
	Compressibility	c		NPD			
	Air flow resistivity	AF_r		NPD			
Direct airbourne sound insulation index	Air flow resistivity	AF_r		NPD			
Continuous glowing combustion	Continuous glowing combustion			NPD			
Thermal resistance	Thermal resistance	R_D	$m^2 K/W$	2.25	3.40	3.85	4.55
	Thermal conductivity	λ_D	$W/m K$	0.044	0.044	0.044	0.044
	Thickness	d_N	mm	100	150	170	200
	Thickness class	Ti		T1	T1	T1	T1
Water permeability	Short term water absorption	W_p	kg/m^2	NPD			
	Long term water absorption	W_{lp}		NPD			
Water vapour permeability	Water vapour transmission	t or Z		NPD			
Compressive strength	Compressive stress or compressive strength	CS		NPD			
	Point load	F_p		NPD			
Durability of reaction to fire against heat, weathering, ageing/degradation	Durability characteristics (a) (b)			NPD			
Durability of thermal resistance against heat, weathering, ageing/degradation	Thermal resistance (c)	R_D	$m^2 K/W$	2.25	3.40	3.85	4.55
	Thermal conductivity (c)	λ_D	$W/m K$	0.044	0.044	0.044	0.044
	Durability characteristics (d)	d		NPD			
Tensile/fluxural strength	Tensile strength perpendicular to faces (e)	TR		NPD			
Durability of compressive strength against heat, weathering, ageing/degradation	Compressive Creep	Xct, Xt		NPD			

- a) No change in reaction to fire properties for mineral wool products.
- (b) The fire performance of mineral wool does not deteriorate with time. The Euroclass classification of the product is related to the organic content, which cannot increase with time.
- (c) The Thermal conductivity of mineral wool products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air.
- (d) For dimensional stability thickness only.
- (e) This characteristic also covers handling and installation.

0004-CPR-170918

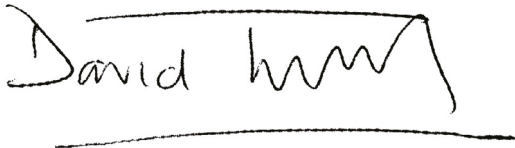
Saint-Gobain Isover reserve the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Saint-Gobain Isover will endeavor to ensure publications are up to date, it is the users responsibility to check with us that it is correct prior to use.

Where pursuant to Article 37 or 38 the Specific Technical Documentation has been used, the requirements with the product complies.

N/A

9. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

A handwritten signature in black ink, appearing to read 'David Travill', is written over a horizontal line. The signature is stylized with a wavy, scribbled end.

**David Travill
Managing Director**

Runcorn, 17th September 2018

0004-CPR-170918

Saint-Gobain Isover reserve the right to alter or amend product specification without notice. The information given in this publication is correct to the best of our knowledge at the time of publication. Whilst Saint-Gobain Isover will endeavor to ensure publications are up to date, it is the users responsibility to check with us that it is correct prior to use.

ISOver
SAINT-GOBAIN